



## SPECIFICATIONS

**CIRCUIT:** SPST

**FUNCTION:** MOMENTARY

**CONTACT RATING:** 1~50mA @ 5V~24VDC (resistive load)

**OPERATING FORCE:** 170 ± 40gf (Standard force)  
260 ± 50gf (High force)

**TOTAL TRAVEL:** 0.25 +0.2/-0.1mm

**ELECTRICAL LIFE:** 500,000 operations min.(Standard force)  
300,000 operations min. (High force)

**CONTACT RESISTANCE:** 100 mΩ max. (initial value)

**INSULATION RESISTANCE:** 100 MΩ min./250VDC

**DIELECTRIC STRENGTH:** 500V RMS @ sea level. (initial value)

**OPERATING TEMPERATURE:** -25°C to 70°C.

## MATERIALS


**CASE:** PBT(UL94V-0).

**HOUSING:** PBT(UL94V-0).

**ACTUATOR:** PC

**TERMINAL/CONTACT:** Brass, silver plated.

## HOW TO ORDER

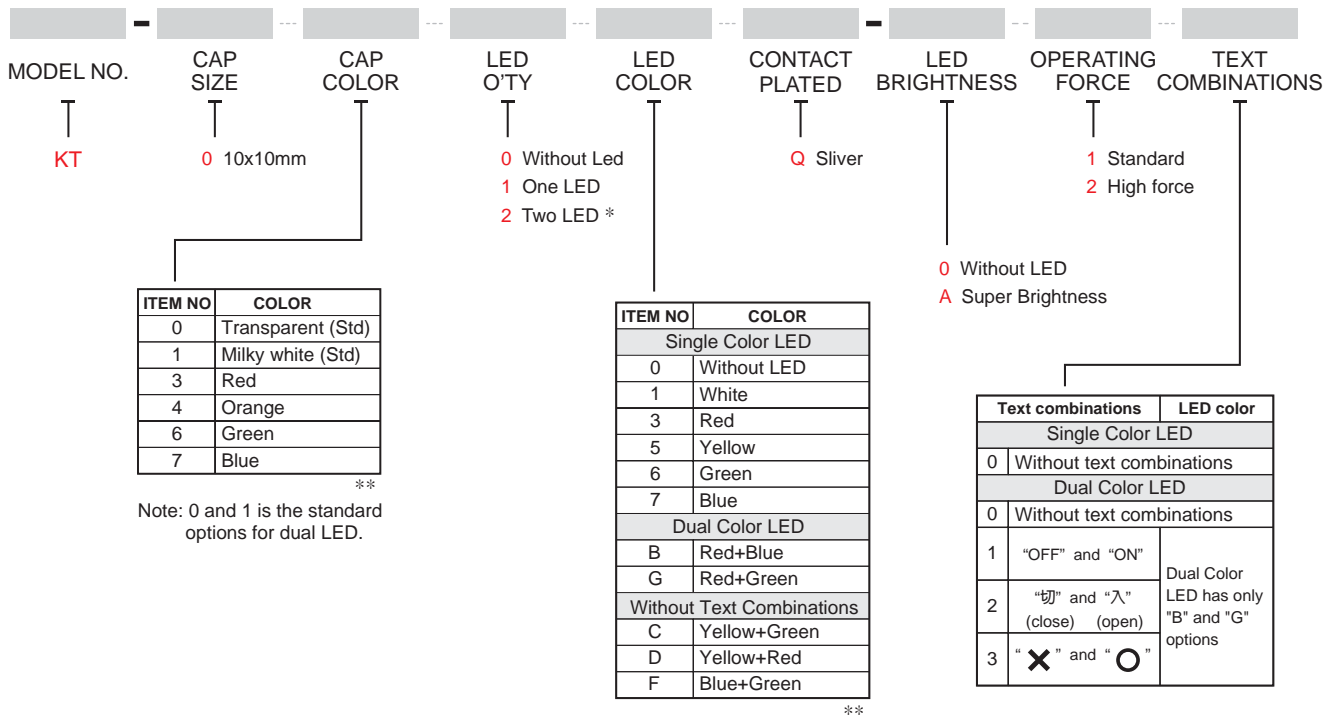






\* Available with Dual LEDs only.  
\*\* Except standard color, for other colors information please consult sales representativity.

EXAMPLE:




KT-0  1  Q-A10  
└─ CAP color  
└─ Single LED color

KT-002  -A1   
└─ Text combinations  
└─ Dual LEDs color

▼ CIRCUIT

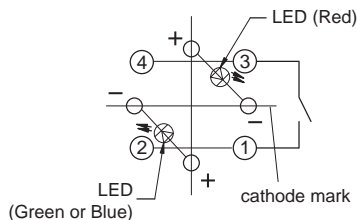

▼ PCB MOUNTING



▼ DIMENSION

